

forte

Exhaust duct cleaning system

Pneumatic rotary brush unit, for the cleaning of kitchen exhaust ducts and industrial facilities up to **1000 mm | 39.3 inch of diameter**.

- Powerful pneumatic motor [11.6 Nm max. torque] necessary for to remove all types of grease and dirt.
- 30 meters | 98.4 inch of semi-rigid hose that allows to work vertically [up and down], horizontally, and to make 90° bends.
- 100% stainless steel motor for greater durability and maintenance free.

PNEUMATIC

For ducts up to

39 inches

Rotary shaft length

98 ft



Brushes

Different materials and sizes for all types of ductwork. **DUO Square system** for effective cleaning in square ducts.

Carrying handle

Easy handling for transportation.


Dual direction of rotation

Left | Right

Shaft guard

Facilitates its take-up and protects it when you are on the move.



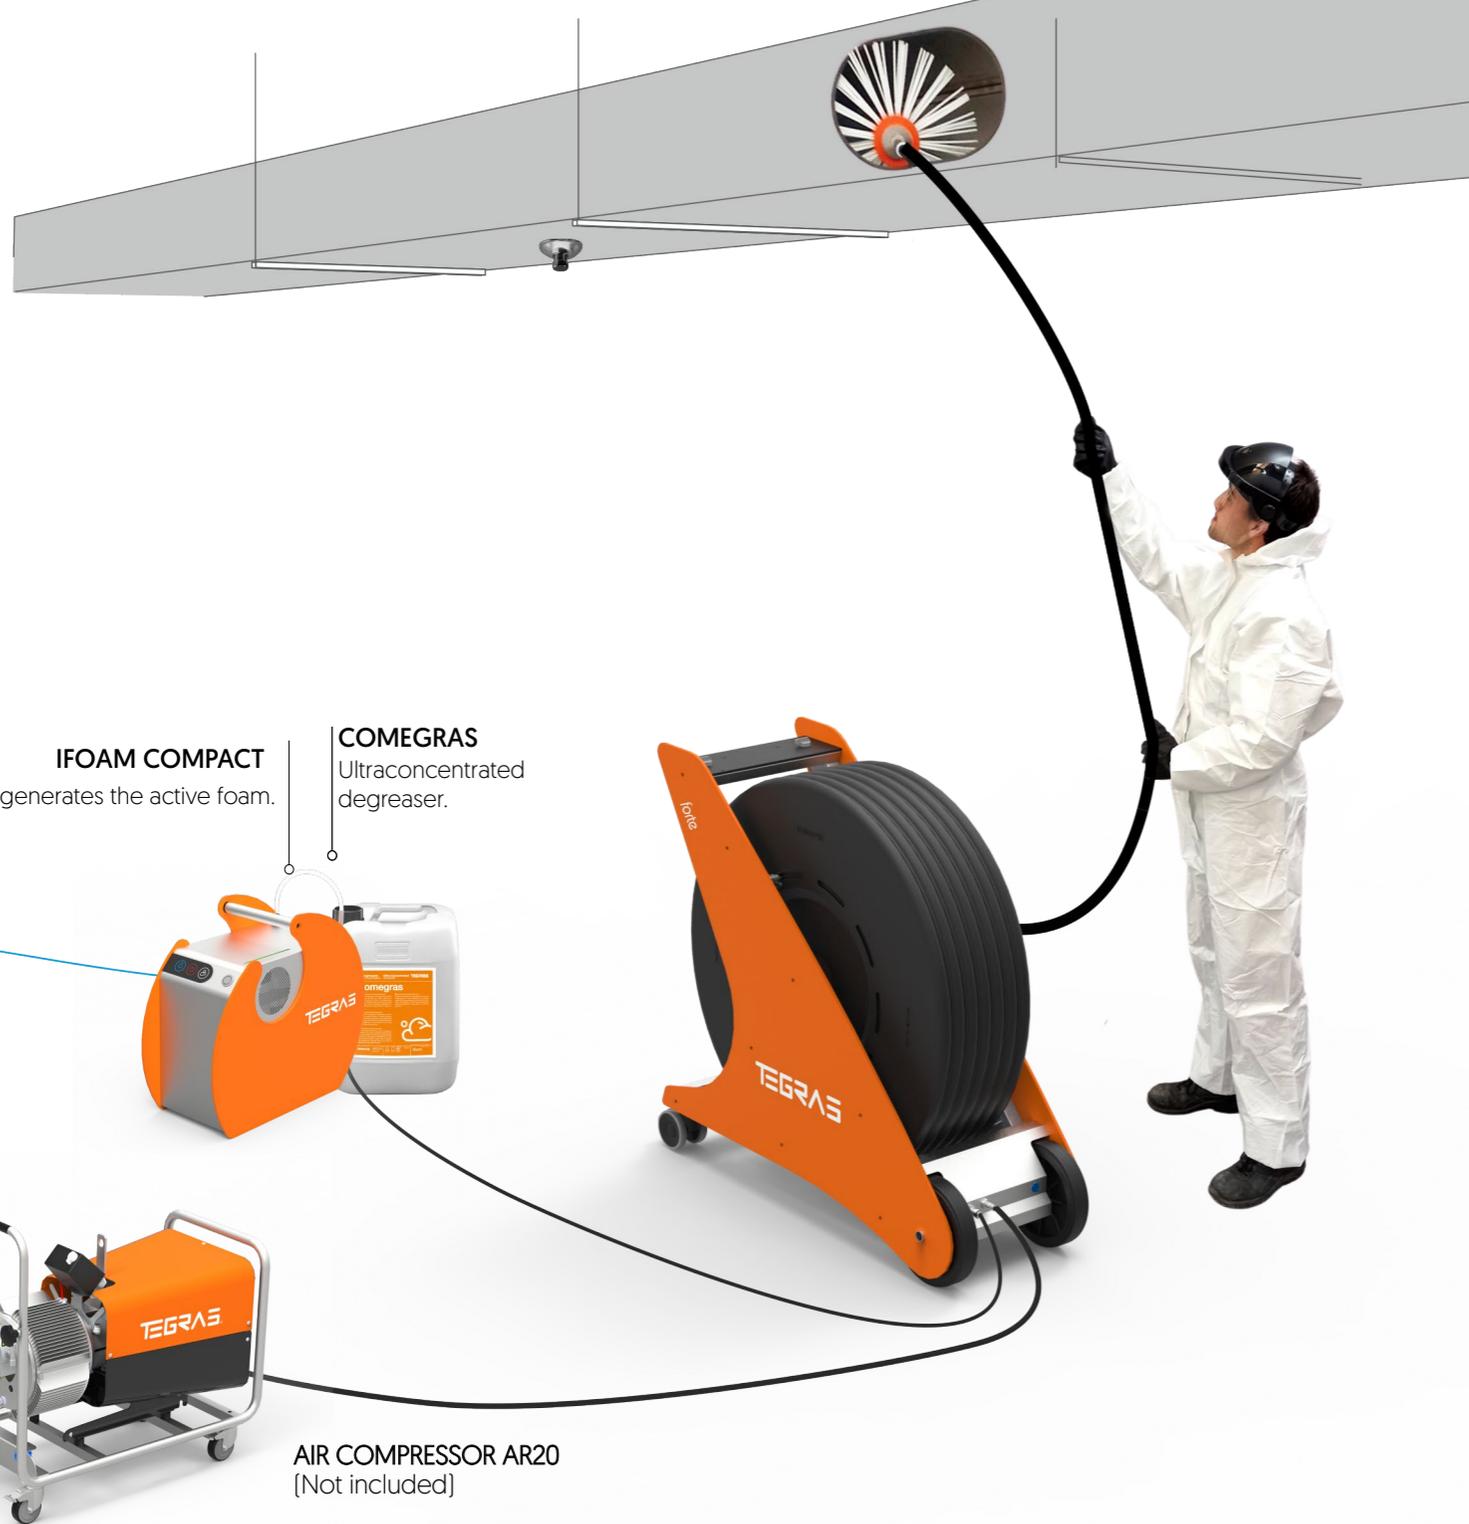

IFOAM COMPACT
generates the active foam.

COMEGRAS
Ultraconcentrated
degreaser.

AIR COMPRESSOR AR20
[Not included]

OPTIONAL ACCESSORIES ▼




BRUSH CENTERING DEVICE.
For ducts from 19.7 inches to
39.3 inch
AC3303130



**ANTI-BREAKAGE
PROTECTOR** for the shaft
and hose.
AC3303112

CONSUMABLES ▼



PACK 5 MIXED BRUSHES.
Steel +nylon. For carbonized
grease. Ø7.8 | 11.8 | 15.7 | 19.7 |
23.6 inches

CP1302828



PACK 5 BRUSHES EXTREME.
Brushes for extreme cleaning.
Ø11.8 | 15.7 | 19.7 | 23.6 | 27.5 inches

CP2300515

PACK 5 NYLON BRUSHES.
Indicated for the removal of
medium-hard grease. Ø11.8
| 15.7 | 23.6 | 27.5 | 31.5 inches

CP1101520

PACK 5 BRUSHES PBT.
Indicated for fatty residue of
medium-high hardness. High
abrasion power.
Ø7.8 | 11.8 | 15.7 | 19.7 | 23.6 inches

CP1203030



COMEGRAS.
Ultraconcentrated
degreaser.
10 kg | 22 lb Jerrycan

PQ8100122



The centering device fixes the brush in the center of the duct.

TECHNICAL FEATURES

Motor supply (Maximum power)	Compressed air 300 l/min 8 bar 10,6 cfm – 8 bar
Rotation speed when empty	500 r.p.m.
Rotation speed maximum power	236,7 r.p.m.
Par máximo	6,5 nm 57,5 lbf.in
Par Minimum starting	8 nm 70,8 lbf.in
Maximum torque	11,6 nm 102,7 ibf-in
Maximum torque	< 70 dB
Direction of rotation	Right Left
Control system	Pneumatic
Panel de control	Valves
Dimensions (L x W x H)	1162 x 430 x 1025 mm 48,98 x 16,93 x 40,35 inches
Weight	67 kg 147.7 lb
Hose length	30 m 98 ft
Structure material	Stainless steel and HDPE

